




硬质合金枪钻毛坯

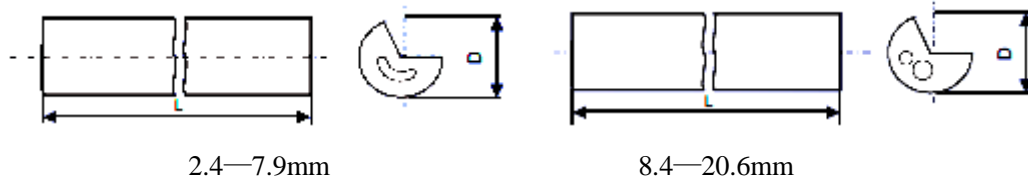

D (mm)	°	L (mm)	EMT100
2.4 +0.2	115°	340 +2/-6	○
2.6 +0.2	115°	340 +2/-6	○
2.8 +0.2	115°	340 +2/-6	○
3.1 +0.2	115°	340 +2/-6	○
3.4 +0.2	115°	340 +2/-6	○
4.0 +0.2	115°	340 +2/-6	○
4.3 +0.2	115°	340 +2/-6	●
4.8 +0.2	115°	340 +2/-6	○
5.4 +0.2	115°	340 +2/-6	●
5.9 +0.3	115°	340 +2/-6	●
6.4 +0.3	115°	340 +2/-6	●
6.9 +0.3	115°	340 +2/-6	○
7.4 +0.3	115°	340 +2/-6	●
7.9 +0.3	115°	340 +2/-6	○
8.4 +0.3/0	115°	340 +2/-6	○
9.0 +0.3/0	115°	340 +2/-6	●
9.5 +0.3/0	115°	340 +2/-6	●
10.5 +0.3/-0.1	115°	340 +2/-6	○
11.0 +0.3/-0.1	115°	340 +2/-6	●
11.5 +0.3/-0.1	115°	340 +2/-6	●
12.0 +0.3/-0.1	115°	340 +2/-6	●
12.5 +0.3/-0.1	115°	340 +2/-6	○
13.5 +0.3/-0.1	115°	340 +2/-6	●
14.5 +0.3/-0.1	115°	340 +2/-6	●
15.5 +0.3/-0.1	115°	340 +2/-6	●
16.5 +0.3/-0.1	115°	340 +2/-6	●
20.6 +0.3/-0.1	115°	340 +2/-6	●